


# movement bead co-extruded V type K2

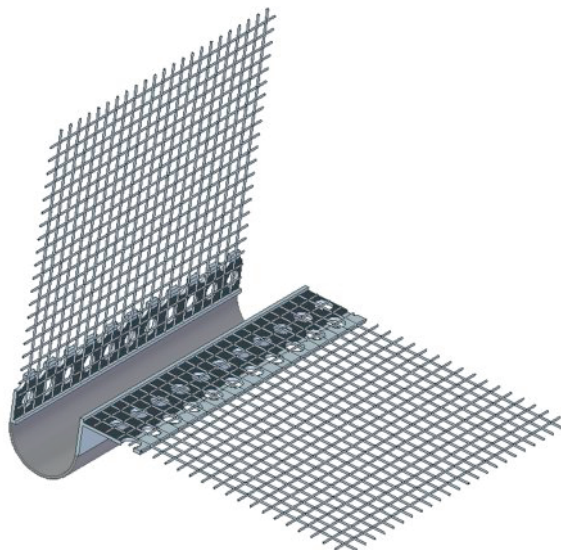

- protection against cracking arisen due to insulation material tension
- the profile for moving joints
- providing of an equal dilatation connection
- length of dilatation tape 40 mm
- the permanent joint sealing, resistant against outer atmosphere
- prevention of entry of pollution and humidity under the insulation material
- a universal profile size, suitable to all insulation material widths
- the profile is designated to protrusive surfaces
- the profile dilatation part is made of a resistant, soft PVC

| Material | Dimension      | Ordering No. | Length | Packing |
|----------|----------------|--------------|--------|---------|
|          | mm             |              | m      | pcs     |
| PVC      | 40 wgm 110x110 | D/31         | 2,5    | 25      |

## Recommendation:

During connecting, the protrusive dilatation part has to be carried over the lower profile. To shorten the profile use scissors designed for work with plastic profiles. The using is only vertical. Perform the cutting with special profile scissors.

## Storage:

A horizontal storage position is recommended. The profiles need to be stored in a dry place. Maximum recommended storage time is 24 months.