




cover profile

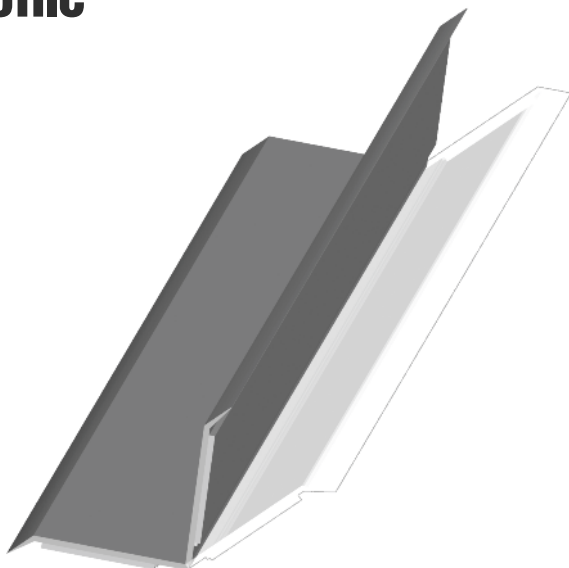

- to cover the joints that are created between walls and ceilings during plasterboard work
- for all sizes of interior and exterior angles
- to replace caulking compounds
- to cover the space between window frames and inside plaster
- to make windows airtight when buildings are maintained
- the profile is delivered in rolls

Material	Dimension	Ordering No.	Length	Packing
	mm		m	pcs
PVC	25 x 25	C/03	50	1

Recommendation:

In order to firmly attach the profile, the base must be dry, free of any adhesive impurities, dust and grease. The application temperature (temperature of the masonry and environment) may never be lower than 5°C. If the temperature is low initial adhesiveness will be lower and it will take longer for the glue to react. It is not recommended you glue the profile onto PP and PE decorative foils.

Storage:

Cartons storage in upright position is necessary! A horizontal storage position is recommended. The profiles need to be stored in a dry place, the temperature range of -5°C to +40°C. Maximum recommended storage time is 18 months.