


dripnose bead M

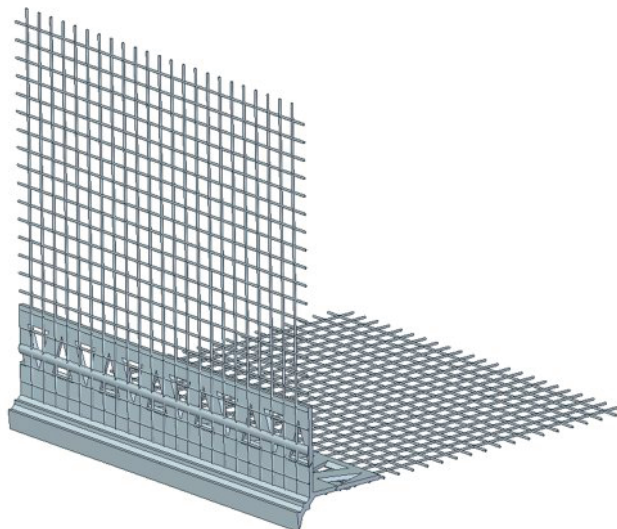

- utilization with outer plasters, for a prevention of water under-flowing (e.g. windows or door ceiling etc.)
- prevents flowing of water under the plaster that might damage the construction upper covering
- an edge protection from a mechanical damage
- aesthetics – a perfectly straight edge
- connection of the profile with glass fibre mesh to reinforcing mesh fabrics used on thermal insulation system surface
- the profile surface can be easily re-painted by a facade paint

Material	Dimension	Ordering No.	Length	Packing
	mm		m	pcs
PVC	20 x 20 wgm 110 x 110	D/29.1	2,0	25
PVC	20 x 20 wgm 110 x 110	D/29.2	2,5	25

Recommendation:

The admitted edge has to be clean, without plaster. During painting, the edge may be painted with paint.

Storage:

A horizontal storage position is recommended. The profiles need to be stored in a dry place. Maximum recommended storage time is 24 months.